
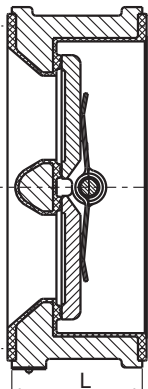


Full RubberLined Wafer Type Double Door Check Valve

Fig. 5316



Valve Standard :
Comply with DIN 3202

Pressure Temperature Ratings

Working pressure	16bar/25bar
Testing Pressure	Shell:24bar/37.5bar
	Seal:17.6bar/27.5bar
Working Temperature	-20°C to 110°C EPDM
	-10°C to 80°C NBR
Suitable Media	Water,Oil&Gas

Material Specification

Part	Material	ASTM Spec.
Body	Ductile Iron	A536 65-45-12
	Stainless Steel	A351 CF8
Disc	Stainless Steel	A351 CF8M
	Bronze	B148 C95400
	Bronze	B148 C95800
	Bronze	BS1400 AB2
Stem	Stainless Steel Monel	
	Stainless Steel Inconel	
Seat	EPDM / NBR	

NOTE :
There is a Screw Eye for DN200 and above size

Dimensions

DN	mm	50	65	80	100	125	150	200	250
	inch	2	2-1/2	3	4	5	6	8	10
L		43	46	64	64	70	76	89	114

DN	mm	300	350	400	450	500	600	700	-
	inch	12	14	16	18	20	24	28	-
L		114	127	140	152	152	178	229	-