

CLASS 150

Bronze Foot Valve (Threaded)

Fig.5505



Specification


MSS SP-80
 Vertical Lift In-Line Type
 Metal Disc NBR Seat
 Threaded to BS 21 (ISO7) / ASME B1.20.1
 Size Range: 15mm(1/2")~50mm(2")

Pressure Ratings

Working Pressure	300 psi (20.7 bar) WOG Non-Shock
Testing Pressure	Shell: 450 psi (31 bar) Hydrostatic Seat: 330 psi (22.7bar) Hydrostatic 80 psi (5.5 bar) Air
Suitable Media	Water

Material List

Part Name	Material	ASTM	BS EN
Body	Bronze (Gunmetal)	B62 C83600	1982 CC491K
Cap	Bronze (Gunmetal)	B62 C83600	1982 CC491K
Disc	Bronze (Gunmetal)	B62 C83600	1982 CC491K
Spring	Stainless Steel 304	A313 304	3111 304S31
Strainer	Stainless Steel 304	A240 304	1449 304S31
Seat	NBR		

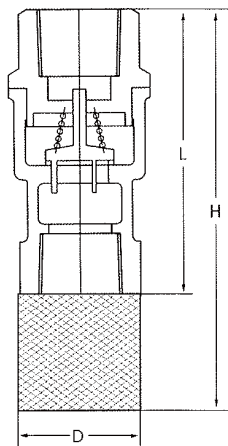

Dimension

Size	mm	15	20	25	32	40	50
	Inch	1/2	3/4	1	1-1/4	1-1/2	2
L		53	60	69	79	80	99
H		70	80	93	98	112	137
D		23	30	35	42	52	63