


CLASS 150

Bronze Angle Valve (Threaded)

Fig.6400

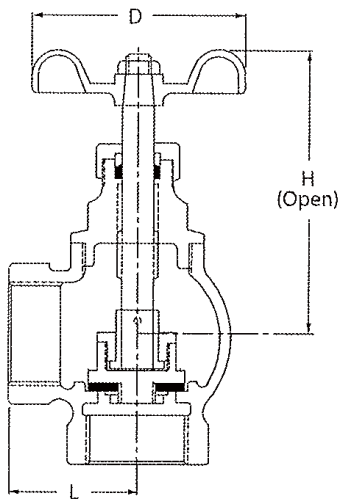

Specification

MSS SP-80
 Screwed-In Bonnet • Angle Type Body • Rising Stem
 Threaded to BS 21 (ISO7) / ASME B1.20.1
 Size Range: 15mm(1/2")~50mm(2")

Pressure Ratings

Working Pressure	300 psi (20.7 bar) WOG Non-Shock 150 psi (10.3 bar) Saturated Steam
Testing Pressure	Shell: 450 psi (31 bar) Hydrostatic Seat: 330 psi (22.7bar) Hydrostatic 80 psi (5.5 bar) Air
Suitable Media	Water, Oil, Gas

Material List

Part Name	Material	ASTM	BS EN
Body	Bronze (Gunmetal)	B62 C83600	1982 CC491K
Bonnet	Bronze (Gunmetal)	B62 C83600	1982 CC491K
Disc	Bronze (Gunmetal)	B62 C83600	1982 CC491K
Stem	Brass Rod	B16 C36000	2874 CZ121
Packing	PTFE		
Packing Nut	Brass Rod	B16 C36000	2874 CZ121
Gland	Brass Rod	B16 C36000	2874 CZ121
Handwheel	Cast Iron		
Gasket	Non Asbestos		

Dimension

Size	mm	15	20	25	32	40	50
	Inch	1/2	3/4	1	1-1/4	1-1/2	2
L		28	33	35	44	48	61
H		86	97	110	135	143	157
D		53	57	65	65	78	97