

## On-off/Level Control


### 1310 Float control valve-Modulating



The Model 1310 Float Valve is a modulating valve that accurately controls the liquid level in tanks. This valve is designed to open fully when the liquid level reaches a preset low point, and close drip-tight when the level reaches a preset high point. The float pilot is remotely installed inside of reservoir.

The float pilot is remotely installed inside of reservoir, or integrally installed with main valve for size  $\leq$  DN100.

### 1316 -Solenoid+Float control-Double Safety

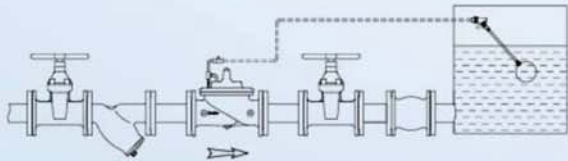


### 1310B Float control valve-Non Modulating



The Model 1310B Float control Valve is a non-modulating valve that accurately controls the liquid level in tanks. This valve is designed to open fully when the liquid level reaches a preset low point, and close drip-tight when the level reaches a preset high point.

The float pilot is remotely installed inside of reservoir, or integrally installed with main valve for size  $\leq$  DN100.

The high and low point can be adjusted on the spot, the Max. adjustable distance is 0.5m, if need more ,consult factory.

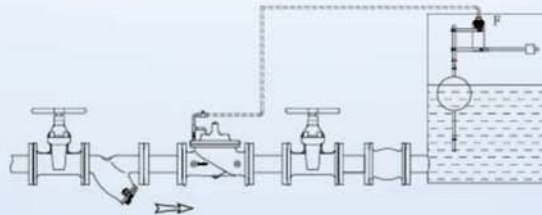

### 1310A Altitude Control Valve



The Model 1310A Altitude Valve controls the high water level in reservoirs without the need for floats or other devices. It remains fully open until the shut-off level is reached.

This valve is hydraulically operated and pilot controlled. The pilot control operates on the differential in forces between a spring load and the water level in the reservoir. The desired high water level is set by adjusting the spring force.

The pilot control measures the reservoir head through a customer supplied sensing line connected directly to the reservoir.

The spring of pilot is according to the height of shut-off level.

