

CLASS125

AWWA C509 NRS Resilient Seat Gate Valve

Fig. 3226




Valve Standard :
Comply with AWWA C509

Pressure Temperature Ratings

Working pressure	200psi
Testing Pressure	Shell:300psi
	Seal:220psi
Working Temperature	-4°F to 230°F EPDM
	14°F to 176°F NBR

Material Specification

Part	Material	ASTM
Body	Ductile Iron	A536 Gr. 65-45-12
Bonnet	Ductile Iron	A536 Gr. 65-45-12
Disc	EPDM Coated DI	A536 Gr. 65-45-12
Stem	Stainless Steel	AISI 420
O-Ring	EPDM / NBR	Commercial
Wrench Nut	Ductile Iron	A536 Gr. 65-45-12

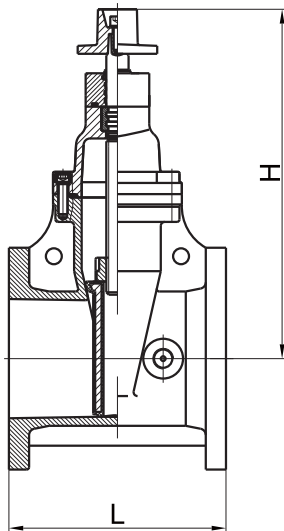

Dimensions

DN	inch	2	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24
L		7.0	7.5	8.0	9.0	10.0	10.5	11.5	13.0	14.0	15	16	17	18	20
H		10.8	11.7	12.7	14.1	16.3	17.6	21.0	24.3	27.8					