

Fig. 3246 (DIN F4)
3247 (DIN F5)



Valve Standard :


Comply with DIN 3352 (F4) / (F5)

Pressure Temperature Ratings

Working pressure	16bar
Testing Pressure	Shell:24bar Seal:17.6bar
Working Temperature	-20°C to 110°C EPDM -10°C to 80°C NBR

Material Specification

Part	Material	EN Spec.
Body	Cast Iron	EN-JL1040
	Ductile Iron	EN-JS1050
Bonnet	Cast Iron	EN-JL1040
	Ductile Iron	EN-JS1050
Disc	EPDM Coated DI	EN-JS1050
Stem	Stainless Steel	BS970 420S37
Gasket	NBR	Commercial
Hand Wheel	Ductile Iron	EN-JS1050

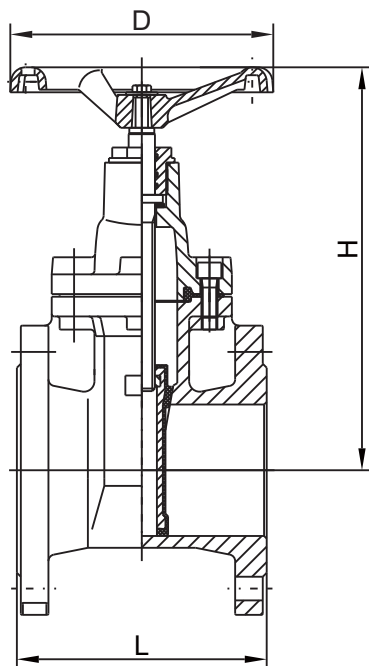

Dimensions

DN	mm	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
	inch	1-1/2	2	2-1/2	3	4	5	6	8	10	12	14	16	18	20	24
L / F4		140	150	170	180	190	200	210	230	250	270	290	310	330	350	390
L / F5			240	250	270	280	300	320	350	450	500	550	600	650	700	800
H		184	195	222	251	282	340	379	461	559	639	762	836	957	1036	1188
D		160	160	200	200	200	250	250	320	370	370	450	450	640	640	640