

Fig. 6125




Valve Standard :
Comply with DIN 3356

Pressure Temperature Ratings

Working pressure	16bar
Testing Pressure	Shell:24bar
	Seal:17.6bar
Working Temperature	-29°C to 65°C 13.8bar
	66°C to 232°C 8.6bar
Suitable Media	Water,Oil&Gas

Material Specification

Part	Material	EN Spec.
Body	Cast Iron	EN-JL 1040
Bonnet	Cast Iron	EN-JL 1040
Disc	Stainless Steel 420 (15-50mm)	BS970 420S37
	Cast Iron (65-300mm)	EN-JL 1040
Disc Ring	Stainless Steel 420	BS970 420S37
Seat Ring	Stainless Steel 420	BS970 420S37
Stem	Stainless Steel 420	BS970 420S37
Packing	Graphite	Non-Asbestos
Hand Wheel	Cast Iron	EN-JL 1040

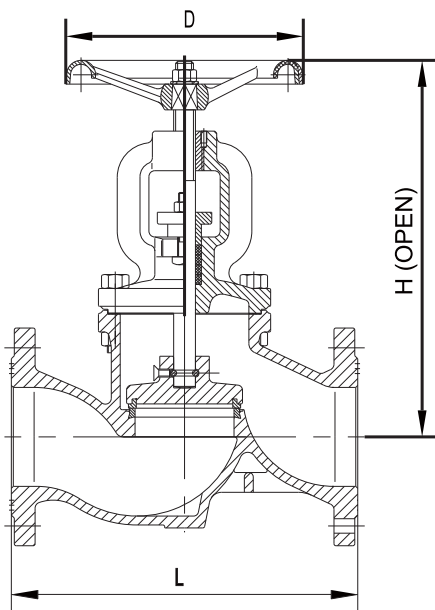

Dimensions

DN	mm	15	20	25	32	40	50	65	80	100	125	150	200	250	300
	inch	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	3	4	5	6	8	10	12
	L	130	150	160	180	200	230	290	310	350	400	480	600	730	850
	H (open)	183	191	216	255	277	304	335	380	426	480	555	660	749	965
	D	100	100	120	120	140	140	200	200	240	280	315	360	400	400